
## 616.23.3.7 (TA-7) Lane Closure on Two-Lane Highways Using Flaggers

SPEED	SIGN SPACING (ft.)		TAPER LENGTH (ft.)		OPTIONAL	CHANNELIZER SPACING (ft.)	
	Undivided (S)	Divided (S)	Shoulder <sup>7</sup> (T1)	Lane <sup>2</sup> (T2)	BUFFER LENGTH (ft.) (B)	Tapers	Buffer/ Work Areas
0-35	200	-	-	-	120	-	50
40-45	350	-	-	-	220	-	100
50-55	500	-	-	-	335	-	100
60-70	1000	-	-	-	550	-	100
1 Shoulder t	aper length based or	n 10 ft. (standard	shoulder width)	offset <b>2</b> Lane ta	aper length based on 1	12 ft. (standard lane	width) offset

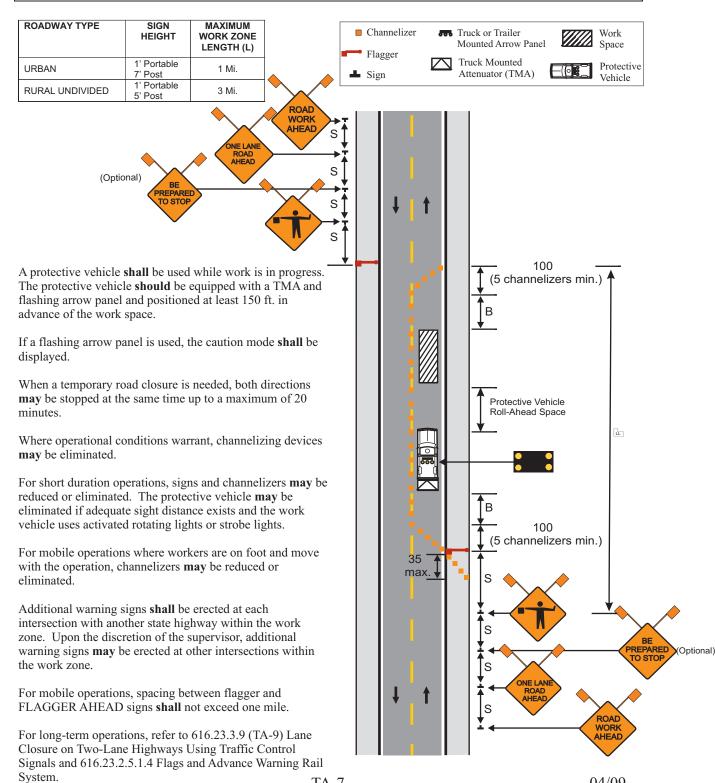

04/09