



| | | | |
|--------------|-------|----------|-----------|
| ROUTE | STATE | DISTRICT | SHEET NO. |
| | MO | | |
| JOB NO. | | | |
| CONTRACT ID. | | | |
| PROJECT NO. | | | |
| COUNTY | | | DATE |

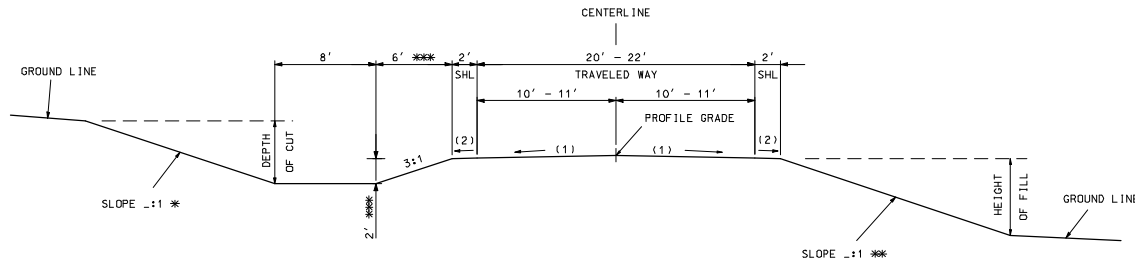

SECTION ON TANGENT
TYPICAL SECTION RTE. XX
STA. XXX.XX TO STA. XXX.XX

CROSS SLOPE
(1) 2.0%
(2) 4.0%
(3) S.E. SLOPE IF GREATER THAN 4.0%.

SEE STANDARDS 203.20, 606.00 AND 609.40 FOR SHOULDER WIDENING.

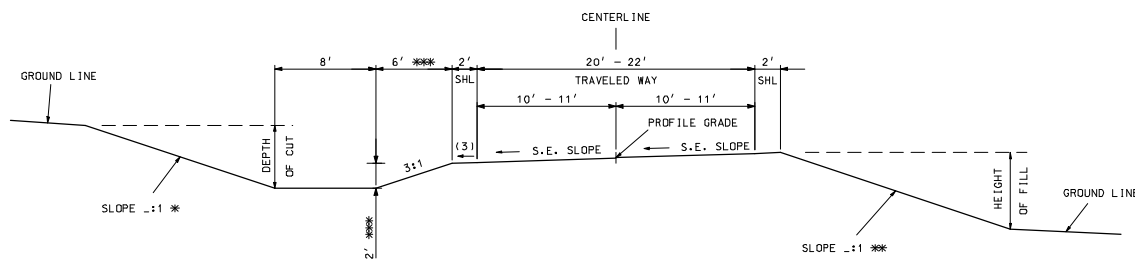

SECTION ON SUPERELEVATED CURVE
TYPICAL SECTION RTE. XX
STA. XXX.XX TO STA. XXX.XX

- * BACKSLOPE DETERMINED BY SOIL SURVEY.
- ** THE FILL SLOPE SHALL BE 3:1 OR FLATTER WHEN THE FILL HEIGHT IS EQUAL TO OR LESS THAN 2 FEET (I.E., THE OFFSET FROM THE TOE OF FILL TO THE SHOULDER POINT IS A MINIMUM OF 6 FEET). THE SLOPE MAY VARY TO MEET THIS REQUIREMENT. FOR FILL HEIGHTS GREATER THAN 2 FEET, THE SLOPE SHALL NOT EXCEED THE MAXIMUM SLOPE DETERMINED BY THE SOIL SURVEY.
- *** 4' DITCH DEPTH PREFERRED IF ALTERNATE 18" ROCK BASE IS USED. SIDESLOPE WIDTH SHALL BE 12' FOR 4' DITCH DEPTH.

| | |
|--------------------|---------------------------|
| | D-66E |
| FUNCTION | LOW VOLUME LOCAL ROADWAYS |
| ADT | < 400 |
| TRAVELED WAY WIDTH | 20' - 22' |
| ROADBED WIDTH | 24' - 26' |
| FORESLOPE | 3:1 |
| DITCH | 2' |